



HARDWARE
FOR GLASS
DOOR
























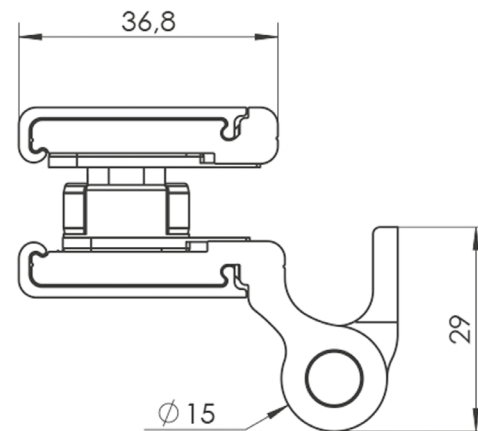
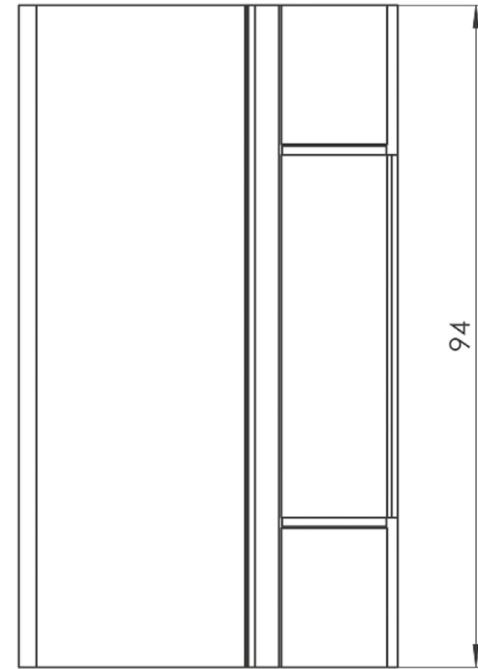


HINGES
FOR GLASS
DOOR


























HINGES FOR GLASS DOOR WTA

- | | |
|--|---|
|  |  |
| 7016 | 7021 |
|  |  |
| 7024 | 9005 |
|  |  |
| 8077 | 8019 |
|  |  |
| 8017 | 8003 |
|  |  |
| 9001 | 1036W |
|  |  |
| 9010 | 9016 |
|  |  |
| 7035 | 9006 |
|  |  |
| SILVER | ANODE NATURAL |
|  |  |
| RAL | INOX COATING |
|  |  |
| GOLD W3 | GOLD W4 |
|  | |
| C-35 ANODE
BLACK F40 | |



HINGES FOR GLASS DOOR WTB


- | | |
|--|---|
|  |  |
| 7016 | 7021 |
|  |  |
| 7024 | 9005 |
|  |  |
| 8077 | 8019 |
|  |  |
| 8017 | 8003 |
|  |  |
| 9001 | 1036W |
|  |  |
| 9010 | 9016 |
|  |  |
| 7035 | 9006 |
|  |  |
| SILVER | ANODE NATURAL |
|  |  |
| RAL | INOX COATING |
|  |  |
| GOLD W3 | GOLD W4 |
|  | |
| C-35 ANODE
BLACK F40 | |

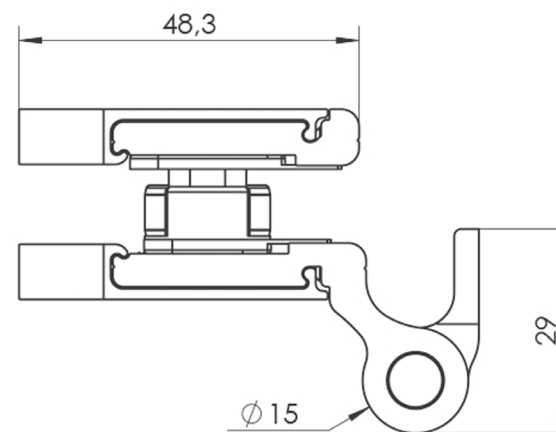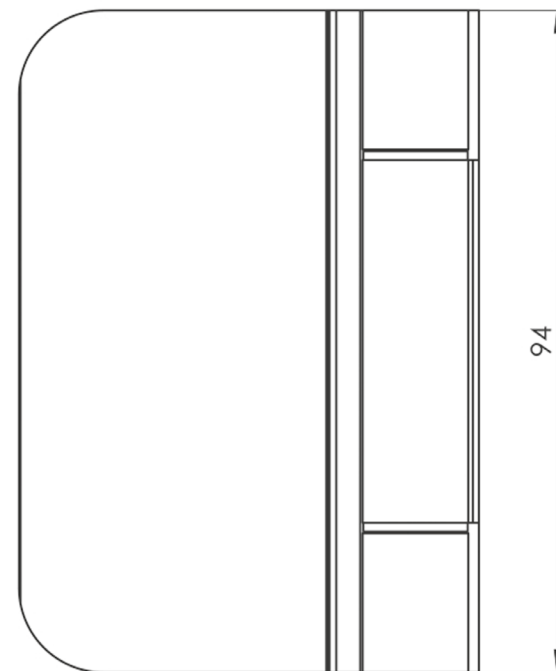

HINGES FOR GLASS DOOR WR-1R

FOR USE IN EMERGENCY EXIT DOORS


WT HINGE CLASSIFICATION EN 1935:2002 + EN 1935:2002/AC:2003



4/4 - SERVICE CLESSES



7/7 - DURABILITY



5/7 - WEIGHT OF TEST DOOR



0/1 - FIRE RESISTANCE



1/1 - SECURITY



4/4 - CORROSION RESISTANCE





0/1 - INTRUSION PROTECTION



12/14 - HINGE CLASS



TOOLING IN GLASS SHEET FOR HINGES WT

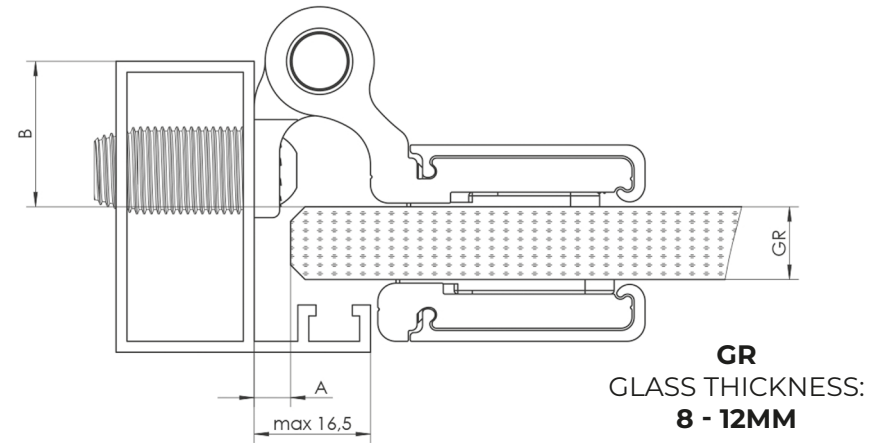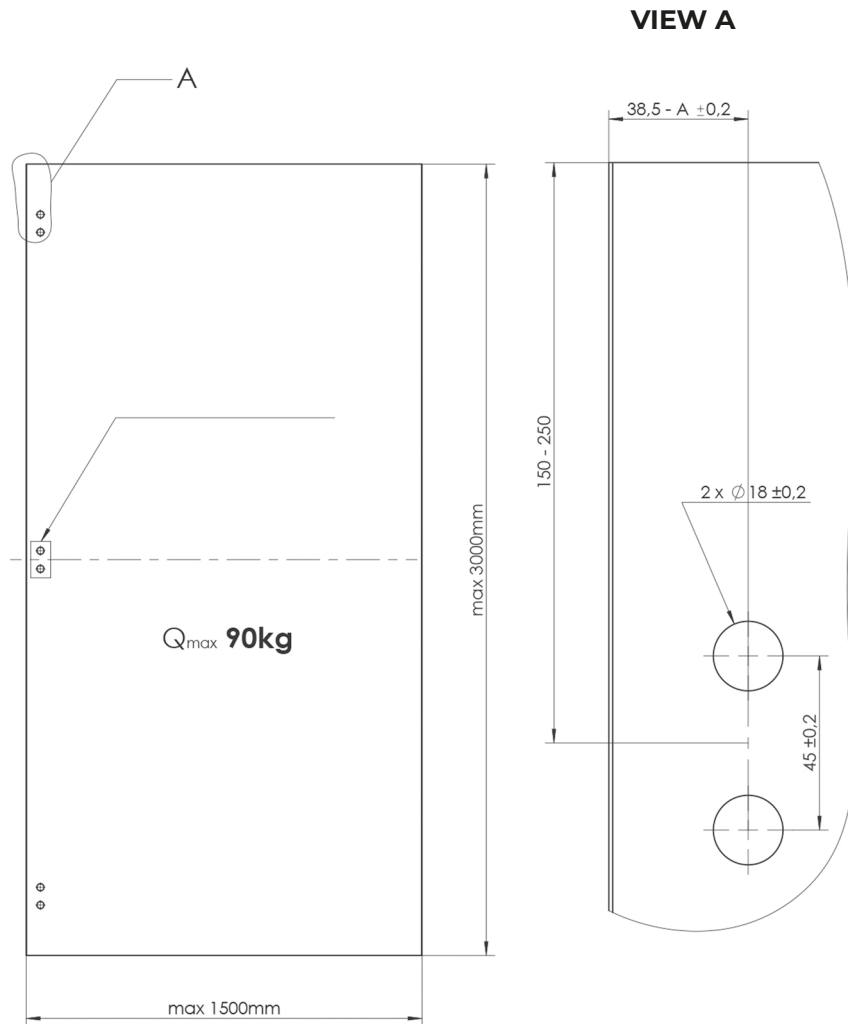



GAP A [mm]	DIMENSIONS IN GLASS D [mm]
4	$34,5 \pm 0,2$
4,5	$34,0 \pm 0,2$
5	$33,5 \pm 0,2$
5,5	$33,0 \pm 0,2$
6	$32,5 \pm 0,2$
6,5	$32,0 \pm 0,2$
7	$31,5 \pm 0,2$
7,5	$31,0 \pm 0,2$
8	$30,5 \pm 0,2$



TOOLING IN A PROFILE FOR HINGES WT



RIVET NUTS FIXING SET

ALUMINIUM OR STEEL
PROFILES
WITH ONE PARTITION

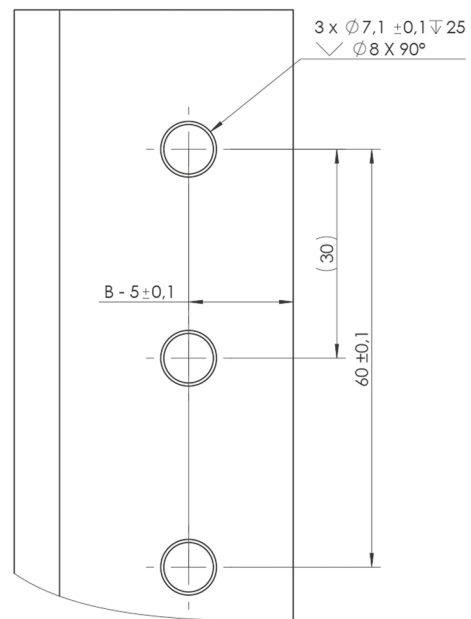


SCREW DOWELS FIXING SET

ALUMINIUM PROFILES
WITH MIN 2 PARTITIONS,
FILLED DOOR FRAME

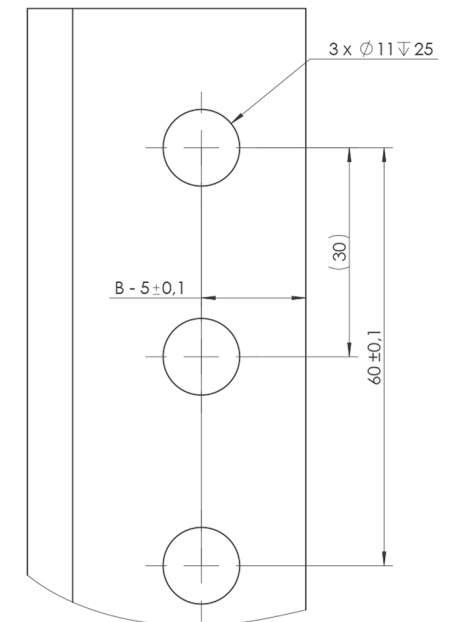

ADJUSTMENT FOR HINGES WT

Adjustment
(left / right)
 $\pm 2,5$ mm



Height
adjustment
 ± 3 mm





WALA Sp. z o.o.
ul. Parkowa 16
43-365 Wilkowice

wala@wala.pl
tel. +48 33 82 72 390
kom. +48 725 70 80 30
www.wala.pl

